

# スリムタイプ


## HS-S-06



### 仕様

サイズ	6 × 12mm
カット単位	50.0mm
入力電圧	24VDC
入力電流	0.4A/m
消費電力	10.6w/m
最大長さ	5m
最小曲半径	>30mm
ケーブル	2P(2 × 0.5mm)
	L : 500mm or 2000mm
保護等級	IK06,IP65
発光面素材	シリコン
重さ	96g/m

シリコンキャップ (IP65) : 工場以外でのカット加工可能  
 ケーブル出し方向 : トップ、ボトム、サイド

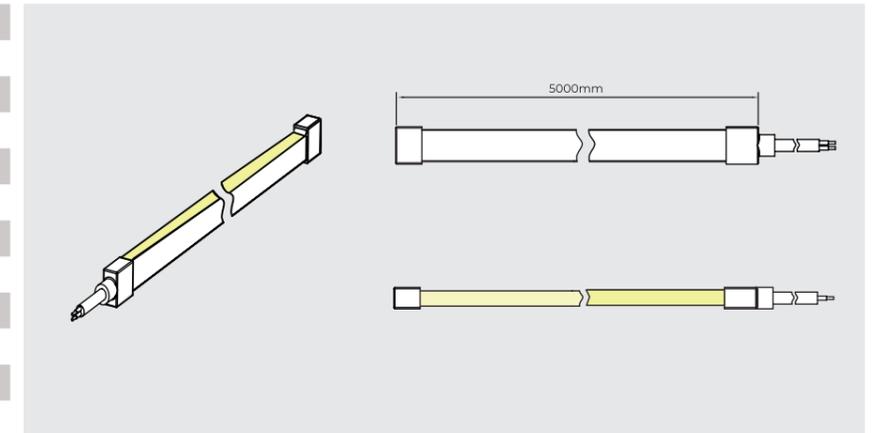

### 光学特性

CRI	CCT	lm/m
>80/90	 2300K	250
	 2700K	280
	 3000K	280
	 4000K	280

± 10%

