


360° ラウンド発光 /13mm ito

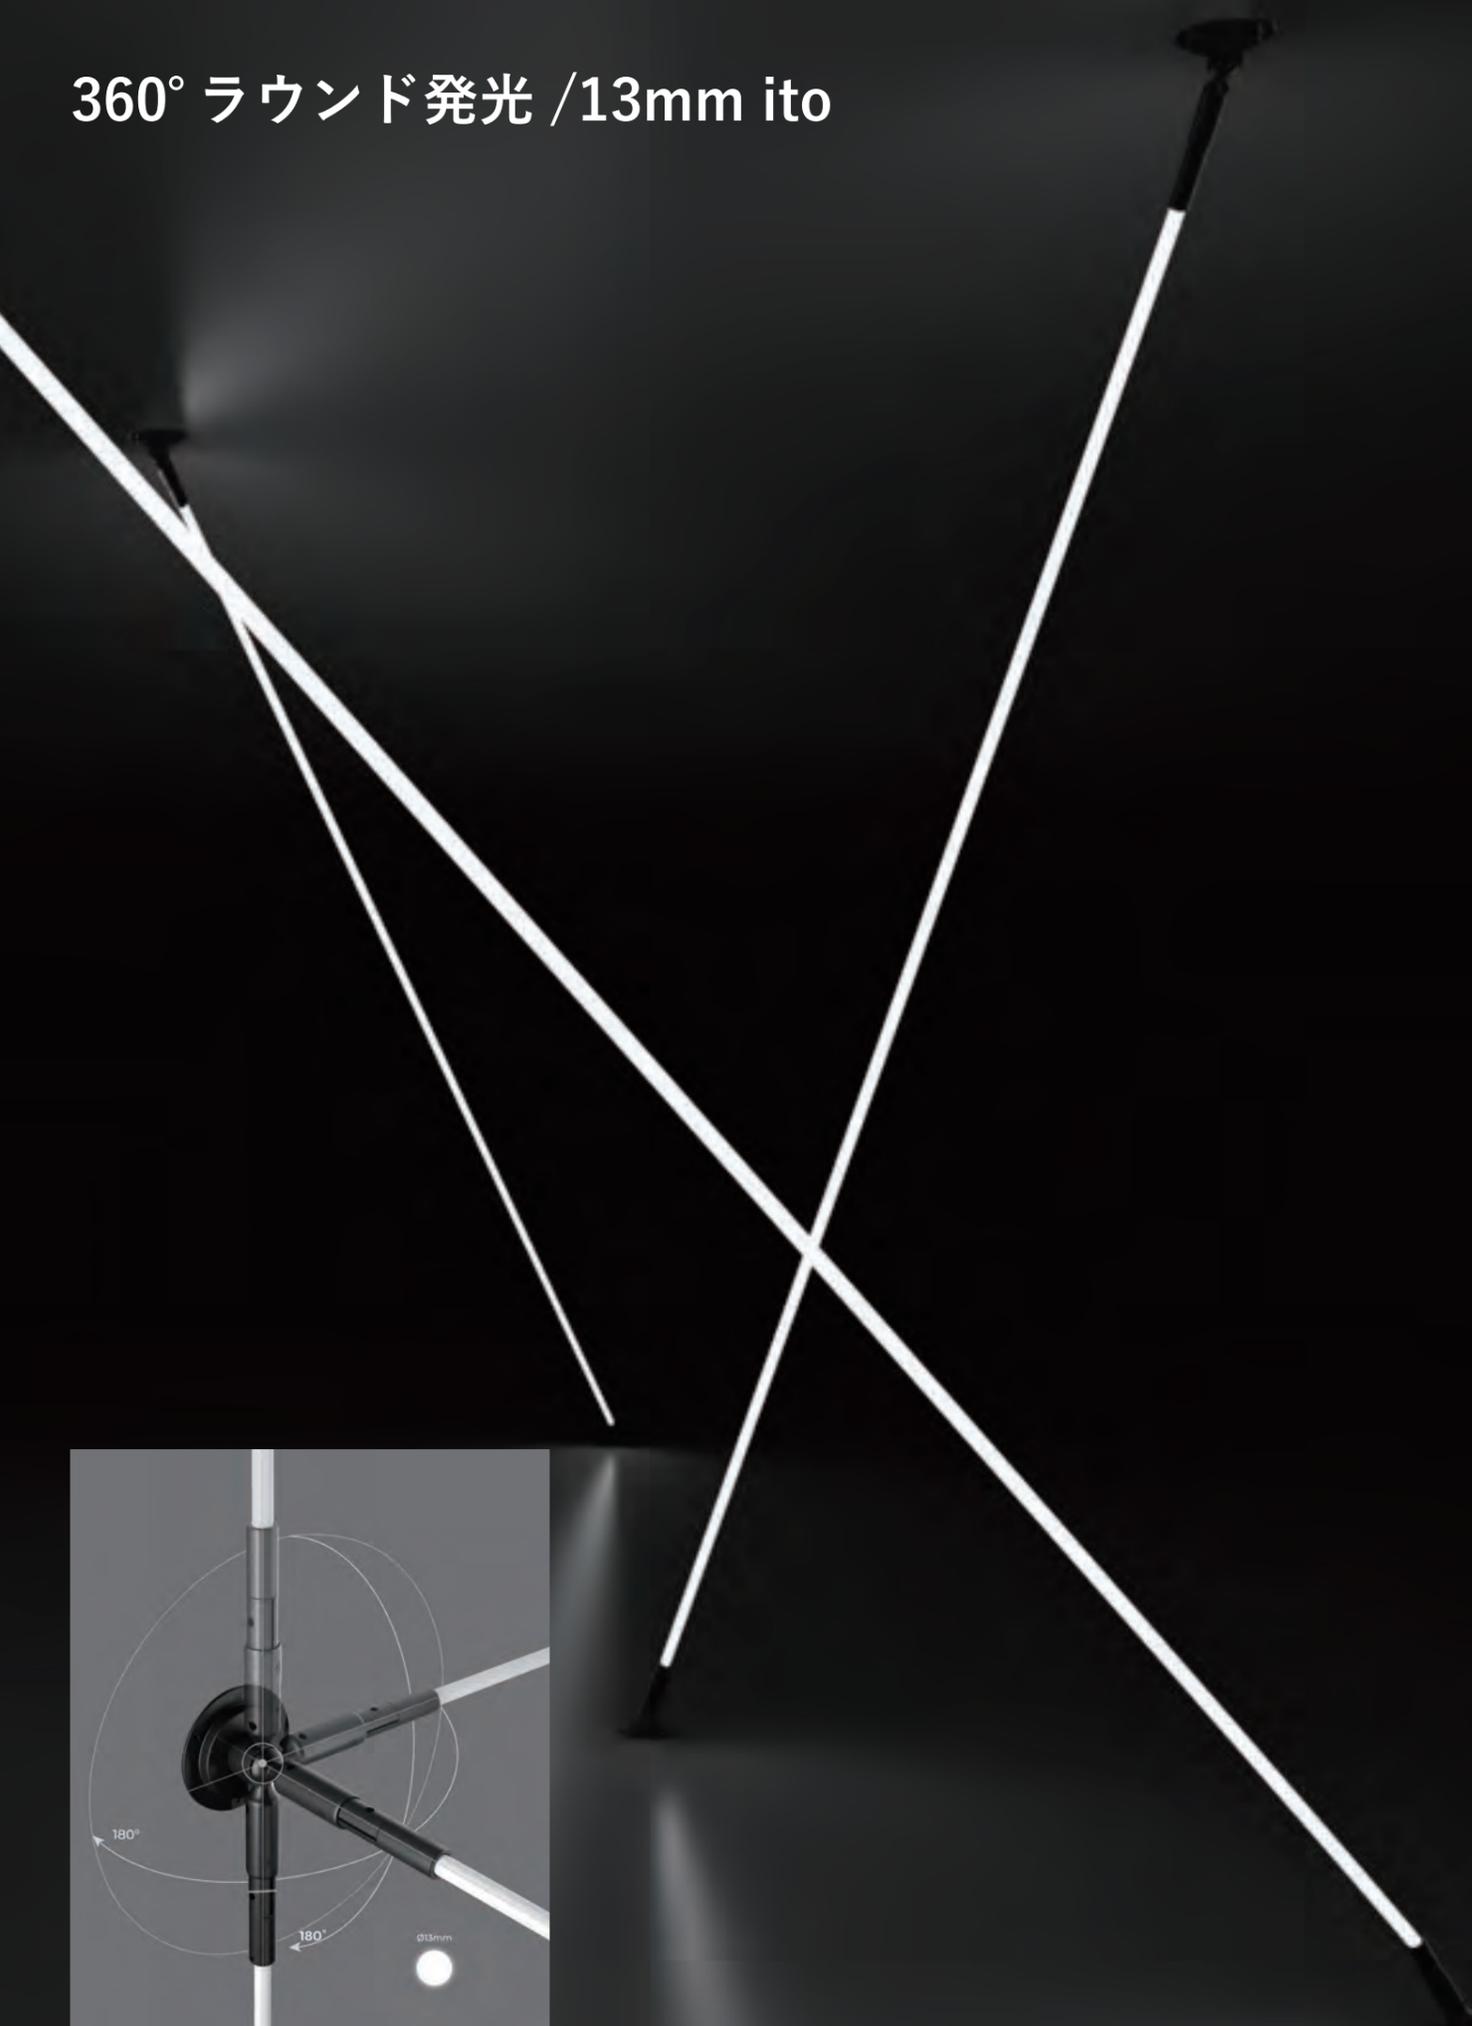



HS-S-R13S

仕様

CCT	カット単位	入力電流	消費電力	lm/m	最大長さ	ケーブル	入力電圧	入力電圧 : 24V/48V
2300K	25.0mm	0.54A/m	8.6w/m	585	5m	2芯	24V	保護等級 : IP65
2700K	25.0mm	0.54A/m	8.6w/m	675	5m	2芯	24V	発光面素材 : シリコン
3000K	25.0mm	0.54A/m	8.6w/m	700	5m	2芯	24V	CRI : >90 (単色)
4300K	25.0mm	0.54A/m	8.6w/m	700	5m	2芯	24V	重量 : 650g/m
2300K	50.0mm	0.27A/m	8.6w/m	585	10m	2芯	48V	
2700K	50.0mm	0.27A/m	8.6w/m	675	10m	2芯	48V	
3000K	50.0mm	0.27A/m	8.6w/m	700	10m	2芯	48V	
4300K	50.0mm	0.27A/m	8.6w/m	700	10m	2芯	48V	

± 10%

トップ出し (IP65)

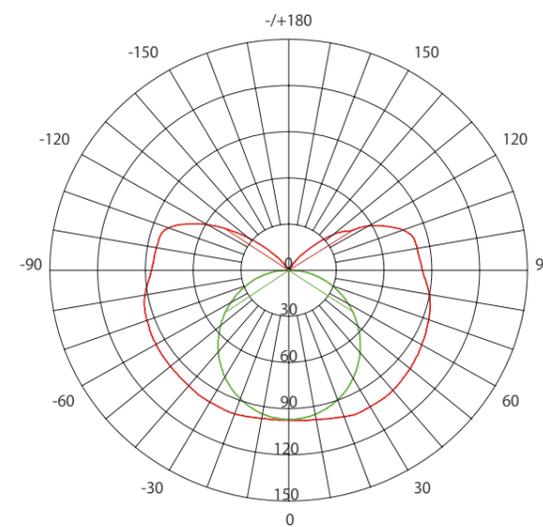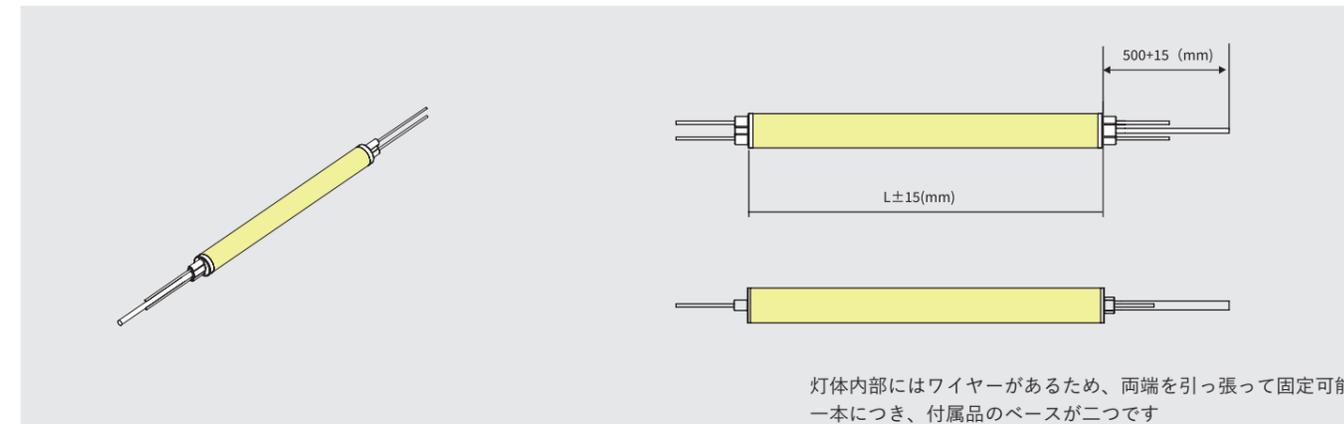

AVERAGE BEAM ANGLE(50%) : 179.4°
 UNT : cd — C0/180,247.0° — C90/270,111.8°

